

Elektrický ohřev EOVk

je totožný s typem EOV, pouze průtok vody zařízením je snímán průtokovým spínačem.

The electric heater EOVk

is the same as model EOV, just water flow is controled by flow switch.

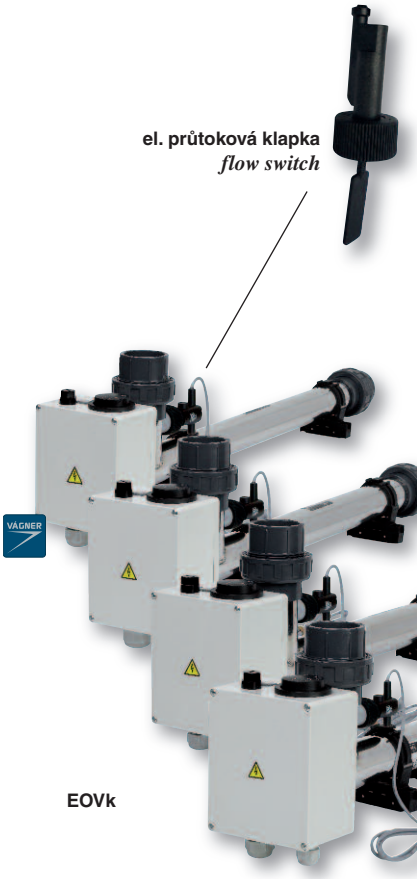


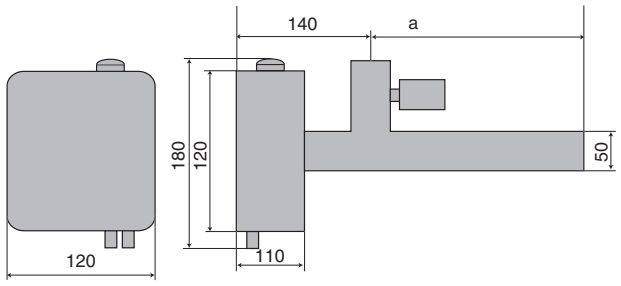

Typ/type	kW	* A 1f / 3f	V	a [mm]	napojení connection
EOVk-3-V 1f/3f	3	16 / 10	230/400	480	50 mm
EOVk-6-V 1f/3f	6	32 / 16	230/400	480	50 mm
EOVk-9-V 1f/3f	9	50 / 20	230/400	600	50 mm
EOVk-12-V 3f	12	25	400	600	50 mm
EOVk-15-V 3f	15	32	400	720	50 mm
EOVk-18-V 3f	18	32	400	720	50 mm

* Doporučené min. jištění / *Recommended min. safety fuse*

Správná instalace ohřívače
The right heaters instalation

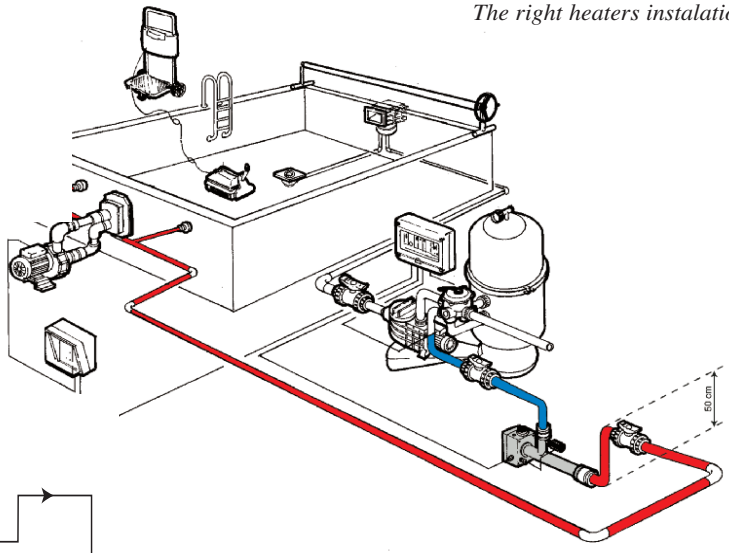

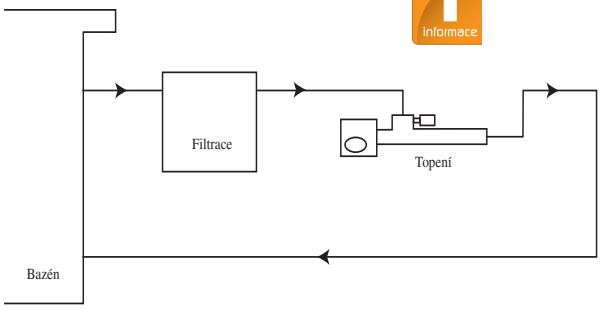


Schéma zapojení el. topení
Circuit diagram

Topení EOVk — *Heater EOVk*

					cena Kč	€
5801703	C	EOVk-3, 3 kW, 230 V, nerez, s el. průtokovou klapkou *EOVk-3, 3 kW, 230 V, stainless steel, with flow switch*		2,90	9 420,-	
5801706	C	EOVk-6, 6 kW, 400 V, nerez, s el. průtokovou klapkou *EOVk-6, 6 kW, 400 V, stainless steel, with flow switch*		2,90	9 550,-	
5801709	C	EOVk-9, 9 kW, 400 V, nerez, s el. průtokovou klapkou *EOVk-9, 9 kW, 400 V, stainless steel, with flow switch*		3,20	9 780,-	
5801712	C	EOVk-12, 12 kW, 400 V, nerez, s el. průtokovou klapkou *EOVk-12, 12 kW, 400 V, stainless steel, with flow switch*		3,20	9 850,-	
5801715	C	EOVk-15, 15 kW, 400 V, nerez, s el. průtokovou klapkou *EOVk-15, 15 kW, 400 V, stainless steel, with flow switch*		3,75	10 290,-	
5801718	C	EOVk-18, 18 kW, 400 V, nerez, s el. průtokovou klapkou *EOVk-18, 18 kW, 400 V, stainless steel, with flow switch*		3,75	10 350,-	