

Topení EOVTi

má tělo ohřívače vyrobeno z plastu odolávajícího vysoké teplotě. Napojení na vodní okruh je lepením s rozebíratelnou koncovkou a přechodem na PVC.
Je osazen TITANOVOU topnou patronou. TITAN nejlépe z dostupných materiálů odolává korozi.
Tento typ ohřevu vody je vhodný pro abnormální namáhání pro větší zátěž s větší koncentrací chlóru. Je možné ho použít v kombinaci s jakoukoli úpravou vody, jako jsou zejména elektro-chemické solinátory atd.
Typ EOVTi je vybaven termostatem do 40 °C, tepelnou pojistkou a průtokovou klapkou a 2 ks držáků pro snadné upevnění.

The EOVTi heater

body is made of a high-temperature resistant plastic. Connection to the water circuit is provided by adhesive bonding with a detachable adaptor and conversion to PVC.
The heater is equipped with the TITANIUM heating element. TITANIUM has the best corrosion resistance out of all available materials.
This type of water heating is suitable for abnormal extensive use and high chlorine concentrations. It can be used in combination with any water treatment such as electro-chemical solinators etc.
The EOVTi type accessories are analogous to the EOV and EOVp types – thermostat for temperatures of up to 40 °C, thermal fuse and flow switch.
Includes 2 brackets for an easy attachment

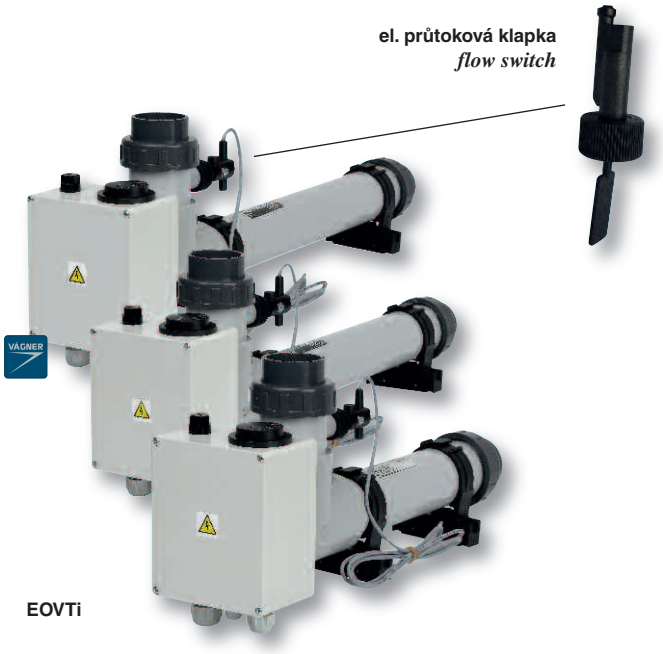


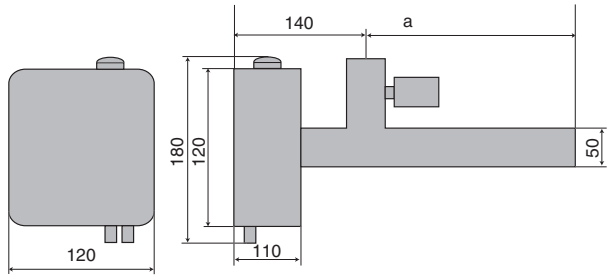


Typ/type	kW	A 1f / 3f	V	a [mm]	napojení connection
EOVTi-3-V 1f/3f	3	16 / 10	230/400	380	50 mm
EOVTi-6-V 1f/3f	6	32 / 16	230/400	480	50 mm
EOVTi-9-V 1f/3f	9	50 / 20	230/400	620	50 mm
EOVTi-12-V 3f	12	25	400	620	50 mm

Topení EOVTi		*Heater EOVTi*			cena Kč	€
5801203	C	EOVTi-3, 3 kW, 3 x 230 V, Titan s el. průtokovou klapkou *EOVTi-3, 3 kW, 3 x 230 V, Titanium with flow switch*		3,35	8 980,-	
5801206	C	EOVTi-6, 6 kW, 3 x 230 V, Titan s el. průtokovou klapkou *EOVTi-6, 6 kW, 3 x 230 V, Titanium with flow switch*		3,45	9 550,-	
5801209	C	EOVTi-9, 9 kW, 3 x 230 V, Titan s el. průtokovou klapkou *EOVTi-9, 9 kW, 3 x 230 V, Titanium with flow switch*		3,80	10 850,-	
5801212	C	EOVTi-12, 12 kW, 3 x 400 V, Titan s el. průtokovou klapkou *EOVTi-12, 12 kW, 3 x 400 V, Titanium with flow switch*		3,90	11 120,-	

informace

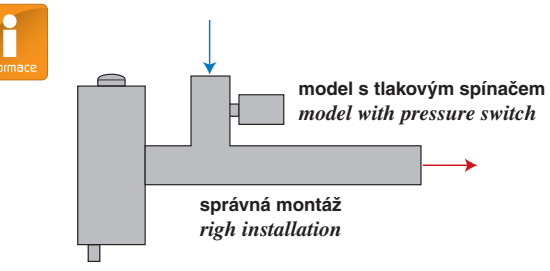

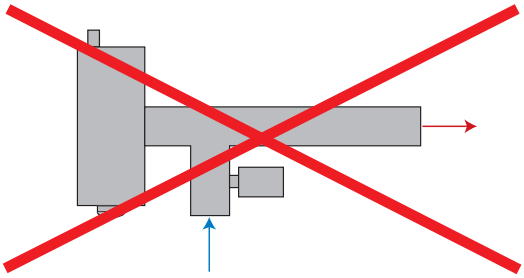

Správná instalace ohřívačů
The right heaters instalation

